

HON

Electrical Accessories




ADD CONNECTIVITY... AT YOUR CONVENIENCE

HON The HON Company
200 Oak Street
Muscatine, IA 52761
800.833.3964 | hon.com

© 2016 The HON Company, Form No. H4830 (8/16)
To view the registered and unregistered trademarks owned and used by The HON Company, visit hon.com/protected-marks. Models, upholstery and finishes are subject to change without notice.

Emails. Shared servers. Video conferencing. These days, we have a million reasons to get online and stay in touch. Retrofitting an existing workstation for constant connectivity used to mean adding a power strip or data cabling that is bulky, awkward and hard to reach. With HON electrical modules and grommets, you can conveniently route all your technology and power cables to the worksurface height. Choose from four different mounts and a variety of receptacle configurations. Once installed, quickly plug in and get connected, or unplug and move throughout the space. Each option provides constant connectivity without sacrificing desk space, and will amp up anyone's productivity.

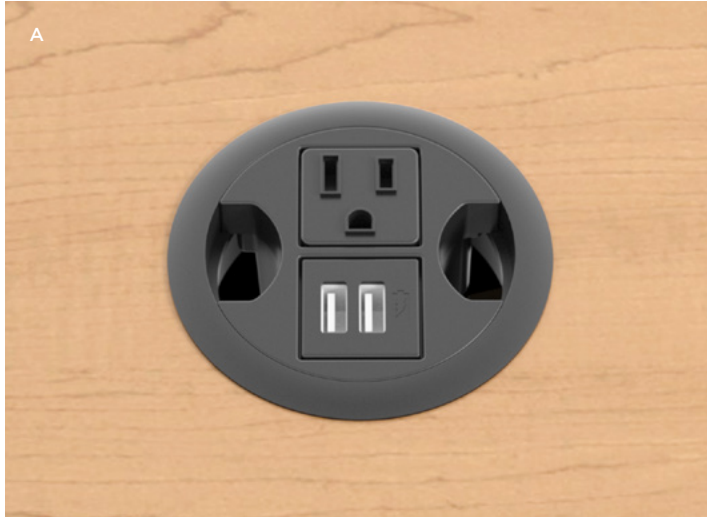

A. GROMMET MOUNT

- Models: HGRMTAC & HGRMTUSB2, HGRMTAC2, HGRMTDATA, HGRMTMINIAC, HGRMTMINIUSB
- Configurations: 2 Receptacles or 1 Receptacle with 2 USB, 2 Data, 1 AC, 2 USB
- For use on all Systems, Caseworks and Tables series
- 6' (all models) or 10' (HGRMTAC2 ONLY) cord with standard plug
- Requires a 3" round or 1.67" round cutout in surface

B. SURFACE CLAMP

- Models: HPWRMOD3WC, HPWRMOD2WC, HCOMDOME2
- Configurations: 3 Receptacles or 2 Receptacles with 2 USB or 2 Receptacles with 2 Data/Pass-Thru
- For use on any worksurface with a 2.5" overhang.
- 6' cord with standard plug
- Color Options: Brilliant White, Charcoal (HPWRMOD3WC & HPWRMOD2WC only), Loft (HCOMDOME2 only)

C. IN-SURFACE MOUNT

- Models: HTPWRGROM1, HTPWRGROM2, HTPWRGROM3, HTPWRGROM4, HTPWRGROM5
- For use on Preside® conferencing series
- Multiple configurations available with combinations of receptacles, data, VGA, HDMI and USB options
- 6' cord with standard plug

D. UNDER-SURFACE MOUNT

- Models: HPWRMOD2, HPWRMOD3UWM, HPWRMOD2UWM
- Configurations: 4 Receptacles or 3 Receptacles or 2 Receptacles with 2 USB
- For use on any worksurface with a 5" clearance
- 6' cord (HPWRMOD3UWM, HPWRMOD2UWM only) or 10' cord (HPWRMOD2 only) with standard plug